

Bristol/IP Driver

© 2025 PTC Inc. All Rights Reserved.

Table of Contents

Bristol/IP Driver	1
Table of Contents	2
Welcome to the Bristol/IP Driver Help Center	4
Overview	5
BSAP Networks	5
Channel Setup	6
Channel Properties – General	6
Tag Counts	7
Channel Properties – Ethernet Communications	7
Channel Properties – Write Optimizations	7
Channel Properties – Advanced	8
Channel Properties – Communication Serialization	8
Channel Properties – Local Port	9
Device Setup	10
Device Properties – General	10
Operating Mode	11
Tag Counts	11
Device Properties – Scan Mode	11
Device Properties – Auto-Demotion	12
Device Properties – Tag Generation	13
Device Properties – Communication	14
Device Properties – Timing	15
Device Properties – Tag Import Properties	15
Device Properties – Redundancy	15
Optimizing Communications	16
Data Types Description	16
Address Descriptions	16
Error Descriptions	18
<Operation> on device <device name> signal <signal> caused an overflow. Some data has been lost.	18
<Operation> on device <device name> signal <signal> failed. The device does not contain this signal.	19
<Operation> on device <device name> signal <signal> failed. The device requires higher level permissions to perform this operation.	19
<Operation> on device <device name> signal <signal> failed. The request was malformed or incomplete.	19
A read by address failed because the MSD version for device <device name> changed. The driver is sending read by name requests to get the updated MSD version from the device.	20
A write by address failed because the MSD version for device <device name> changed. The driver is sending a write by name request to the device.	20
Failed to send a request to device <device>. The device is not communicating.	20
Failed to send a request to device <device>. The packet is malformed or too large.	20

Failed to stop Winsock communications.	21
Failure to initiate 'winsock.dll' [Error:<error>].	21
Invalid BSAP function.	22
Read failed on device <device> address <address>. The server expects this address to be of type <type>, but it is of type <type> in the device.	22
The device is not responding.	22
The response received from device <device> contains an invalid sequence number. Review timing properties.	22
The response received from device <device> is malformed.	23
The response received from device <device> is too large (%<count> bytes). The data is lost. ...	23
The signal was not found.	23
The string written to device <device>, address <address> is too long. The maximum supported string is <count> characters. The write will continue as is, but the device will truncate the value.	24
Unable to bind to port <port> on Channel <channel>.	24
Unable to create a socket connection for Channel <channel>.	24
Unable to generate a tag database for device <device name>. Reason: Import file does not contain any valid signals.	24
Write to device <device name> signal <signal> failed. The signal's manual inhibit attribute is set to false, not allowing writes.	25
Write to device <device name> signal <signal> failed. The signal is read only.	25
Write to device <device name> signal <signal> failed. The write value is invalid. Make sure the value is within the approved BSAP range.	25
Appendix: Tag Generation	26
Index	29

Welcome to the Bristol/IP Driver Help Center

This is the user documentation for Kepware Bristol/IP Driver. This documentation is updated regularly to reflect the latest functionality and information.

[Overview](#)

What is the Bristol/IP Driver?

[Setup](#)

How do I configure channels for use with this driver?

[Optimizing Communications](#)

How do I optimize communications on the Bristol/IP Driver?

[Data Types Description](#)

What data types are supported by this driver?

[Address Descriptions](#)

How do I address a data location on the Bristol/IP Driver?

[Automatic Tag Generation](#)

How can I configure tags for this driver?

[Error Descriptions](#)

What error messages are produced by the Bristol/IP Driver?

Version 1.031


© 2025 PTC Inc. All Rights Reserved.

Overview

The Bristol IP Driver provides a reliable way to communicate with DPC and ControlWave devices. It supports communications to both Ethernet-enabled Bristol devices and to serial Bristol devices (through an Ethernet-enabled Bristol device acting as a gateway). It supports Network 3000 Series (DPC 33xx) and ControlWave devices. *For more information, refer to [Device Setup](#).*

BSAP Networks

The image below displays a typical Bristol IP Driver configuration. The devices are physical devices. The server channels and devices are not displayed for simplicity.

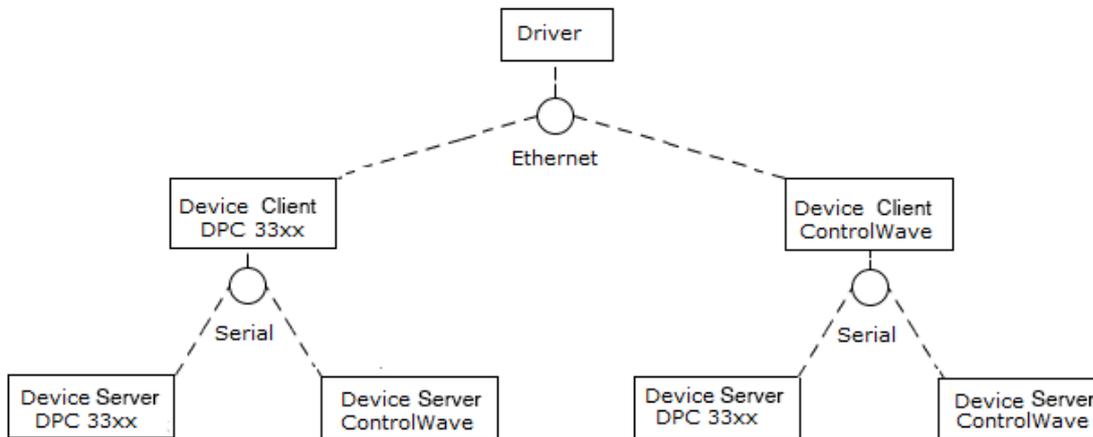

The Bristol/IP Driver communicates to Client or Server devices using Ethernet (UDP). Communications to Client devices are direct: the driver sends a request to the device and it responds. Communications to server devices are indirect: the driver sends a request through the client device. In most configurations, server devices communicate over serial to the client.

● **Note:** BSAP allows six levels of hierarchy including the Client device, or five levels of hierarchy below the Client device. Each level below the Client device can have a maximum of 128 devices.

Channel and Device Limits

The maximum number of channels supported by this driver is 256. The maximum number of devices supported by this driver is 8192 per channel.

Operations by Symbolic Name vs. by Address

Bristol IP devices support reads and writes by address or by symbolic name. Reads and writes by symbolic name are usually less efficient because the request contains the signal name in ASCII format. Reads and writes by address are usually more efficient because the address is only two bytes. The driver will request by address whenever possible.

Supported BSAP Functions

The Bristol IP Driver supports a set of Bristol BSAP functions that are a subset of those available in the Remote Database Access (RDB) specification. All request types have the ability to request more than one signal at a time. For efficiency, the driver will include multiple signals in a request whenever possible.

● **Note:** Requests can be made using either the signal's symbolic name or the signal's address (which is generally more efficient).

Operation	Description
Read Signal By Address	Read one or more signals using the two byte address.
Read Signal By Symbolic Name	Read one or more signals by signal name. Request the signal's two byte address in addition to the value.
Write Signal By Address	Write one or more signals using the two byte address.
Write Signal By Symbolic Name	Write one or more signals by signal name.

Channel Setup

Network Interface

The Network Interface property specifies the Network Interface Controller (NIC) over which the channel will communicate. Each channel must have a unique NIC and port. For example, two Bristol channels cannot be bound to the default NIC on Port 1234: only one channel can bind to the port and communicate.

● **Note:** The default adapter is the adapter bound to the machine hostname.

Communication Serialization

The Bristol IP Driver supports Communication Serialization, which specifies whether data transmissions should be limited to one channel at a time. *For more information, refer to [Channel Properties – Advanced](#).*

Local Port

The Local Port property group specifies the port that all devices under the channel will use for communications.

Property Groups	Local Port	
Local Port	UDP Port (decimal)	1234

UDP Port: This property specifies the local port to which the channel will be bound. The default setting for most Bristol devices is 1234. Users that change the UDP Port may also need to change the device configuration to communicate with the port.

Channel Properties – General

This server supports the use of multiple simultaneous communications drivers. Each protocol or driver used in a server project is called a channel. A server project may consist of many channels with the same communications driver or with unique communications drivers. A channel acts as the basic building block of an OPC link. This group is used to specify general channel properties, such as the identification attributes and operating mode.

Property Groups	Identification	
General	Name	
Write Optimizations	Description	
Advanced	Driver	
	Diagnostics	
	Diagnostics Capture	Disable
	Tag Counts	
	Static Tags	10

Identification

Name: Specify the user-defined identity of this channel. In each server project, each channel name must be unique. Although names can be up to 256 characters, some client applications have a limited display window when browsing the OPC server's tag space. The channel name is part of the OPC browser information. The property is required for creating a channel.

● *For information on reserved characters, refer to "How To... Properly Name a Channel, Device, Tag, and Tag Group" in the server help.*

Description: Specify user-defined information about this channel.

● Many of these properties, including Description, have an associated system tag.

Driver: Specify the protocol / driver for this channel. Specify the device driver that was selected during channel creation. It is a disabled setting in the channel properties. The property is required for creating a channel.

● **Note:** With the server's online full-time operation, these properties can be changed at any time. This includes changing the channel name to prevent clients from registering data with the server. If a client has already acquired an item from the server before the channel name is changed, the items are unaffected. If, after the channel name has been changed, the client application releases the item and attempts to re-acquire using the old channel name, the item is not accepted. Changes to the properties should not be made once a large client application has been

developed. Utilize proper user role and privilege management to prevent operators from changing properties or accessing server features.

Diagnostics

Diagnostics Capture: When enabled, this option makes the channel's diagnostic information available to OPC applications. Because the server's diagnostic features require a minimal amount of overhead processing, it is recommended that they be utilized when needed and disabled when not. The default is disabled.

● **Note:** This property is not available if the driver or operating system does not support diagnostics.

● *For more information, refer to Communication Diagnostics and Statistics Tags in server help.*

Tag Counts

Static Tags: Provides the total number of defined static tags at this level (device or channel). This information can be helpful in troubleshooting and load balancing.

Channel Properties – Ethernet Communications

Ethernet Communication can be used to communicate with devices.

Property Groups	Ethernet Settings	
General	Network Adapter	Default
Ethernet Communications		
Write Optimizations		
Advanced		

Ethernet Settings

Network Adapter: Specify the network adapter to bind. When left blank or Default is selected, the operating system selects the default adapter.

Channel Properties – Write Optimizations

The server must ensure that the data written from the client application gets to the device on time. Given this goal, the server provides optimization properties to meet specific needs or improve application responsiveness.

Property Groups	Write Optimizations	
General	Optimization Method	Write Only Latest Value for All Tags
Write Optimizations	Duty Cycle	10

Write Optimizations

Optimization Method: Controls how write data is passed to the underlying communications driver. The options are:

- **Write All Values for All Tags:** This option forces the server to attempt to write every value to the controller. In this mode, the server continues to gather write requests and add them to the server's internal write queue. The server processes the write queue and attempts to empty it by writing data to the device as quickly as possible. This mode ensures that everything written from the client applications is sent to the target device. This mode should be selected if the write operation order or the write item's content must uniquely be seen at the target device.
- **Write Only Latest Value for Non-Boolean Tags:** Many consecutive writes to the same value can accumulate in the write queue due to the time required to actually send the data to the device. If the server updates a write value that has already been placed in the write queue, far fewer writes are needed to reach the same final output value. In this way, no extra writes accumulate in the server's queue. When the user stops moving the slide switch, the value in the device is at the correct value at virtually the same time. As the mode states, any value that is not a Boolean value is updated in the server's internal write queue and sent to the device at the next possible opportunity. This can greatly improve the application performance.

- **Note:** This option does not attempt to optimize writes to Boolean values. It allows users to optimize the operation of HMI data without causing problems with Boolean operations, such as a momentary push button.
- **Write Only Latest Value for All Tags:** This option takes the theory behind the second optimization mode and applies it to all tags. It is especially useful if the application only needs to send the latest value to the device. This mode optimizes all writes by updating the tags currently in the write queue before they are sent. This is the default mode.

Duty Cycle: is used to control the ratio of write to read operations. The ratio is always based on one read for every one to ten writes. The duty cycle is set to ten by default, meaning that ten writes occur for each read operation. Although the application is performing a large number of continuous writes, it must be ensured that read data is still given time to process. A setting of one results in one read operation for every write operation. If there are no write operations to perform, reads are processed continuously. This allows optimization for applications with continuous writes versus a more balanced back and forth data flow.

● **Note:** It is recommended that the application be characterized for compatibility with the write optimization enhancements before being used in a production environment.

Channel Properties – Advanced

This group is used to specify advanced channel properties. Not all drivers support all properties; so the Advanced group does not appear for those devices.

Property Groups	<input type="checkbox"/> Non-Normalized Float Handling	
General	Floating-Point Values	Replace with Zero
Write Optimizations	<input type="checkbox"/> Inter-Device Delay	
Advanced	Inter-Device Delay (ms)	0

Non-Normalized Float Handling: A non-normalized value is defined as Infinity, Not-a-Number (NaN), or as a Denormalized Number. The default is Replace with Zero. Drivers that have native float handling may default to Unmodified. Non-normalized float handling allows users to specify how a driver handles non-normalized IEEE-754 floating point data. Descriptions of the options are as follows:

- **Replace with Zero:** This option allows a driver to replace non-normalized IEEE-754 floating point values with zero before being transferred to clients.
- **Unmodified:** This option allows a driver to transfer IEEE-754 denormalized, normalized, non-number, and infinity values to clients without any conversion or changes.

● **Note:** This property is disabled if the driver does not support floating-point values or if it only supports the option that is displayed. According to the channel's float normalization setting, only real-time driver tags (such as values and arrays) are subject to float normalization. For example, EFM data is not affected by this setting.

● *For more information on the floating-point values, refer to "How To ... Work with Non-Normalized Floating-Point Values" in the server help.*

Inter-Device Delay: Specify the amount of time the communications channel waits to send new requests to the next device after data is received from the current device on the same channel. Zero (0) disables the delay.

● **Note:** This property is not available for all drivers, models, and dependent settings.

Channel Properties – Communication Serialization

The server's multi-threading architecture allows channels to communicate with devices in parallel. Although this is efficient, communication can be serialized in cases with physical network restrictions (such as Ethernet radios). Communication serialization limits communication to one channel at a time within a virtual network.

The term "virtual network" describes a collection of channels and associated devices that use the same pipeline for communications. For example, the pipeline of an Ethernet radio is the client radio. All channels using the same client radio are associated with the same virtual network. Channels are allowed to communicate each in turn, in a "round-robin" manner. By default, a channel can process one transaction before handing communications off to another channel. A transaction can include one or more tags. If the controlling channel contains a device that is not

responding to a request, the channel cannot release control until the transaction times out. This results in data update delays for the other channels in the virtual network.

Property Groups	[-] Channel-Level Settings	
General	Virtual Network	None
Serial Communications	Transactions per Cycle	1
Communication Serialization	[-] Global Settings	
	Network Mode	Load Balanced

Channel-Level Settings

Virtual Network: Specify the channel's mode of communication serialization. Options include None and Network 1 - Network 500. The default is None. Descriptions of the options are as follows:

- **None:** This option disables communication serialization for the channel.
- **Network 1 - Network 500:** This option specifies the virtual network to which the channel is assigned.

Transactions per Cycle: Specify the number of single blocked/non-blocked read/write transactions that can occur on the channel. When a channel is given the opportunity to communicate, this is the number of transactions attempted. The valid range is 1 to 99. The default is 1.

Global Settings

Network Mode: This property is used to control how channel communication is delegated. In **Load Balanced** mode, each channel is given the opportunity to communicate in turn, one at a time. In **Priority** mode, channels are given the opportunity to communicate according to the following rules (highest to lowest priority):

1. Channels with pending writes have the highest priority.
2. Channels with pending explicit reads (through internal plug-ins or external client interfaces) are prioritized based on the read's priority.
3. Scanned reads and other periodic events (driver specific).

The default is Load Balanced and affects *all* virtual networks and channels.

⚠ Devices that rely on unsolicited responses should not be placed in a virtual network. In situations where communications must be serialized, it is recommended that Auto-Demotion be enabled.

Due to differences in the way that drivers read and write data (such as in single, blocked, or non-blocked transactions); the application's Transactions per cycle property may need to be adjusted. When doing so, consider the following factors:

- How many tags must be read from each channel?
- How often is data written to each channel?
- Is the channel using a serial or Ethernet driver?
- Does the driver read tags in separate requests, or are multiple tags read in a block?
- Have the device's Timing properties (such as Request timeout and Fail after *x* successive timeouts) been optimized for the virtual network's communication medium?

Channel Properties – Local Port

The Local Port property group specifies the port that all devices under the channel use for communications.

Property Groups	[-] Local Port	
Local Port	UDP Port (decimal)	1234

Local Port

- **UDP Port:** Specify the local port to which the channel is bound. The default for most Bristol devices is 1234. Changing the UDP Port may also require a change to the device configuration to communicate with the port.

• This driver supports additional channel properties. For more information, refer to "What is a Channel?" in the server help file.

Device Setup

Supported Devices

- Network 3000 Series (DPC 33xx) devices with BSAP IP (Ethernet) support. 386EX Protected Mode DPC3330 and DPC 3335 with PES03/PEX03 or newer Firmware is required.
- ControlWave devices with BSAP IP (Ethernet) support. ControlWave Micro CWP/LPS/CWR 02.00 or newer Firmware is required.

Communication Protocol

Bristol BSAP IP Protocol (UDP)

Device Properties – General

A device represents a single target on a communications channel. If the driver supports multiple controllers, users must enter a device ID for each controller.

Property Groups	Identification	
General	Name	
	Description	
	Channel Assignment	
	Driver	
	Model	
	ID Format	Decimal
	ID	2

Identification

Name: Specify the name of the device. It is a logical user-defined name that can be up to 256 characters long and may be used on multiple channels.

• **Note:** Although descriptive names are generally a good idea, some OPC client applications may have a limited display window when browsing the OPC server's tag space. The device name and channel name become part of the browse tree information as well. Within an OPC client, the combination of channel name and device name would appear as "ChannelName.DeviceName".

• For more information, refer to "How To... Properly Name a Channel, Device, Tag, and Tag Group" in server help.

Description: Specify the user-defined information about this device.

• Many of these properties, including Description, have an associated system tag.

Channel Assignment: Specify the user-defined name of the channel to which this device currently belongs.

Driver: Selected protocol driver for this device.

Model: Specify the type of device that is associated with this ID. The contents of the drop-down menu depend on the type of communications driver being used. Models that are not supported by a driver are disabled. If the communications driver supports multiple device models, the model selection can only be changed when there are no client applications connected to the device.

• **Note:** If the communication driver supports multiple models, users should try to match the model selection to the physical device. If the device is not represented in the drop-down menu, select a model that conforms closest to the target device. Some drivers support a model selection called "Open," which allows users to communicate without knowing the specific details of the target device. For more information, refer to the driver documentation.

ID: Specify the device's driver-specific station or node. The type of ID entered depends on the communications driver being used. For many communication drivers, the ID is a numeric value. Drivers that support a Numeric ID provide users with the option to enter a numeric value whose format can be changed to suit the needs of the application or the characteristics of the selected communications driver. The format is set by the driver by default.

Options include Decimal, Octal, and Hexadecimal.

● **Note:** If the driver is Ethernet-based or supports an unconventional station or node name, the device's TCP/IP address may be used as the device ID. TCP/IP addresses consist of four values that are separated by periods, with each value in the range of 0 to 255. Some device IDs are string based. There may be additional properties to configure within the ID field, depending on the driver.

Operating Mode

Property Groups	+ Identification	
General	- Operating Mode	
	Data Collection	Enable
	Simulated	No

Data Collection: This property controls the device's active state. Although device communications are enabled by default, this property can be used to disable a physical device. Communications are not attempted when a device is disabled. From a client standpoint, the data is marked as invalid and write operations are not accepted. This property can be changed at any time through this property or the device system tags.

Simulated: Place the device into or out of Simulation Mode. In this mode, the driver does not attempt to communicate with the physical device, but the server continues to return valid OPC data. Simulated stops physical communications with the device, but allows OPC data to be returned to the OPC client as valid data. While in Simulation Mode, the server treats all device data as reflective: whatever is written to the simulated device is read back and each OPC item is treated individually. The data is not saved if the server removes the item (such as when the server is reinitialized). The default is No.

Notes:

1. Updates are not applied until clients disconnect and reconnect.
2. The System tag (`_Simulated`) is read only and cannot be written to for runtime protection. The System tag allows this property to be monitored from the client.
3. In Simulation mode, the item's memory map is based on client update rate(s) (Group Update Rate for OPC clients or Scan Rate for native and DDE interfaces). This means that two clients that reference the same item with different update rates return different data.
4. When a device is simulated, updates may not appear faster than one (1) second in the client.

● Simulation Mode is for test and simulation purposes only. It should never be used in a production environment.

Tag Counts

Property Groups	- Identification	
General	- Operating Mode	
	- Tag Counts	
	Static Tags	130

Static Tags: Provides the total number of defined static tags at this level (device or channel). This information can be helpful in troubleshooting and load balancing.

Device Properties – Scan Mode

The Scan Mode specifies the subscribed-client requested scan rate for tags that require device communications. Synchronous and asynchronous device reads and writes are processed as soon as possible; unaffected by the Scan Mode properties.

Property Groups	☐ Scan Mode	
General	Scan Mode	Respect Client-Specified Scan Rate ▼
Scan Mode	Initial Updates from Cache	Disable

Scan Mode: Specify how tags in the device are scanned for updates sent to subscribing clients. Descriptions of the options are:

- **Respect Client-Specified Scan Rate:** This mode uses the scan rate requested by the client.
- **Request Data No Faster than Scan Rate:** This mode specifies the value set as the maximum scan rate. The valid range is 10 to 99999990 milliseconds. The default is 1000 milliseconds.
 - **Note:** When the server has an active client and items for the device and the scan rate value is increased, the changes take effect immediately. When the scan rate value is decreased, the changes do not take effect until all client applications have been disconnected.
- **Request All Data at Scan Rate:** This mode forces tags to be scanned at the specified rate for subscribed clients. The valid range is 10 to 99999990 milliseconds. The default is 1000 milliseconds.
- **Do Not Scan, Demand Poll Only:** This mode does not periodically poll tags that belong to the device nor perform a read to get an item's initial value once it becomes active. It is the OPC client's responsibility to poll for updates, either by writing to the `_DemandPoll` tag or by issuing explicit device reads for individual items. *For more information, refer to "Device Demand Poll" in server help.*
- **Respect Tag-Specified Scan Rate:** This mode forces static tags to be scanned at the rate specified in their static configuration tag properties. Dynamic tags are scanned at the client-specified scan rate.

Initial Updates from Cache: When enabled, this option allows the server to provide the first updates for newly activated tag references from stored (cached) data. Cache updates can only be provided when the new item reference shares the same address, scan rate, data type, client access, and scaling properties. A device read is used for the initial update for the first client reference only. The default is disabled; any time a client activates a tag reference the server attempts to read the initial value from the device.

Device Properties – Auto-Demotion

The Auto-Demotion properties can temporarily place a device off-scan in the event that a device is not responding. By placing a non-responsive device offline for a specific time period, the driver can continue to optimize its communications with other devices on the same channel. After the time period has been reached, the driver re-attempts to communicate with the non-responsive device. If the device is responsive, the device is placed on-scan; otherwise, it restarts its off-scan time period.

Property Groups	☐ Auto-Demotion	
General	Demote on Failure	Enable ▼
Scan Mode	Timeouts to Demote	3
Timing	Demotion Period (ms)	10000
Auto-Demotion	Discard Requests when Demoted	Disable

Demote on Failure: When enabled, the device is automatically taken off-scan until it is responding again.

● **Tip:** Determine when a device is off-scan by monitoring its demoted state using the `_AutoDemoted` system tag.

Timeouts to Demote: Specify how many successive cycles of request timeouts and retries occur before the device is placed off-scan. The valid range is 1 to 30 successive failures. The default is 3.

Demotion Period: Indicate how long the device should be placed off-scan when the timeouts value is reached. During this period, no read requests are sent to the device and all data associated with the read requests are set to bad quality. When this period expires, the driver places the device on-scan and allows for another attempt at communications. The valid range is 100 to 3600000 milliseconds. The default is 10000 milliseconds.

Discard Requests when Demoted: Select whether or not write requests should be attempted during the off-scan period. Disable to always send write requests regardless of the demotion period. Enable to discard writes; the server automatically fails any write request received from a client and does not post a message to the Event Log.

Device Properties – Tag Generation

The automatic tag database generation features make setting up an application a plug-and-play operation. Select communications drivers can be configured to automatically build a list of tags that correspond to device-specific data. These automatically generated tags (which depend on the nature of the supporting driver) can be browsed from the clients.

⚙️ *Not all devices and drivers support full automatic tag database generation and not all support the same data types. Consult the data types descriptions or the supported data type lists for each driver for specifics.*

If the target device supports its own local tag database, the driver reads the device's tag information and uses the data to generate tags within the server. If the device does not natively support named tags, the driver creates a list of tags based on driver-specific information. An example of these two conditions is as follows:

1. If a data acquisition system supports its own local tag database, the communications driver uses the tag names found in the device to build the server's tags.
2. If an Ethernet I/O system supports detection of its own available I/O module types, the communications driver automatically generates tags in the server that are based on the types of I/O modules plugged into the Ethernet I/O rack.

⚙️ **Note:** Automatic tag database generation's mode of operation is completely configurable. *For more information, refer to the property descriptions below.*

Property Groups	Tag Generation	
General	On Device Startup	Do Not Generate on Startup
Timing	On Duplicate Tag	Delete on Create
Auto-Demotion	Parent Group	
Tag Generation	Allow Automatically Generated Subgroups	Enable
Communications	Create	Create tags
Redundancy		

On Property Change: If the device supports automatic tag generation when certain properties change, the **On Property Change** option is shown. It is set to **Yes** by default, but it can be set to **No** to control over when tag generation is performed. In this case, the **Create tags** action must be manually invoked to perform tag generation. To invoke via the Configuration API service, access `/config/v1/project/channels/{name}/devices/{name}/services/TagGeneration`.

On Device Startup: Specify when OPC tags are automatically generated. Descriptions of the options are as follows:

- **Do Not Generate on Startup:** This option prevents the driver from adding any OPC tags to the tag space of the server. This is the default setting.
- **Always Generate on Startup:** This option causes the driver to evaluate the device for tag information. It also adds tags to the tag space of the server every time the server is launched.
- **Generate on First Startup:** This option causes the driver to evaluate the target device for tag information the first time the project is run. It also adds any OPC tags to the server tag space as needed.

⚙️ **Note:** When the option to automatically generate OPC tags is selected, any tags that are added to the server's tag space must be saved with the project. Users can configure the project to automatically save from the **Tools | Options** menu.

On Duplicate Tag: When automatic tag database generation is enabled, the server needs to know what to do with the tags that it may have previously added or with tags that have been added or modified after the communications driver since their original creation. This setting controls how the server handles OPC tags that were automatically generated and currently exist in the project. It also prevents automatically generated tags from accumulating in the server.

For example, if a user changes the I/O modules in the rack with the server configured to **Always Generate on Startup**, new tags would be added to the server every time the communications driver detected a new I/O module. If the old tags were not removed, many unused tags could accumulate in the server's tag space. The options are:

- **Delete on Create:** This option deletes any tags that were previously added to the tag space before any new tags are added. This is the default setting.
- **Overwrite as Necessary:** This option instructs the server to only remove the tags that the communications driver is replacing with new tags. Any tags that are not being overwritten remain in the server's tag space.
- **Do not Overwrite:** This option prevents the server from removing any tags that were previously generated or already existed in the server. The communications driver can only add tags that are completely new.
- **Do not Overwrite, Log Error:** This option has the same effect as the prior option and also posts an error message to the server's Event Log when a tag overwrite would have occurred.

● **Note:** Removing OPC tags affects tags that have been automatically generated by the communications driver as well as any tags that have been added using names that match generated tags. Users should avoid adding tags to the server using names that may match tags that are automatically generated by the driver.

Parent Group: This property keeps automatically generated tags from mixing with tags that have been entered manually by specifying a group to be used for automatically generated tags. The name of the group can be up to 256 characters. This parent group provides a root branch to which all automatically generated tags are added.

Allow Automatically Generated Subgroups: This property controls whether the server automatically creates subgroups for the automatically generated tags. This is the default setting. If disabled, the server generates the device's tags in a flat list without any grouping. In the server project, the resulting tags are named with the address value. For example, the tag names are not retained during the generation process.

● **Note:** If, as the server is generating tags, a tag is assigned the same name as an existing tag, the system automatically increments to the next highest number so that the tag name is not duplicated. For example, if the generation process creates a tag named "AI22" that already exists, it creates the tag as "AI23" instead.

Create: Initiates the creation of automatically generated OPC tags. If the device's configuration has been modified, **Create tags** forces the driver to reevaluate the device for possible tag changes. Its ability to be accessed from the System tags allows a client application to initiate tag database creation.

● **Note:** **Create tags** is disabled if the Configuration edits a project offline.

Device Properties – Communication

The Communication property group specifies the device's communication properties.

Property Groups	☐ Communication	
General	RTU Global Address (hexadecimal)	0
Scan Mode	RTU IP Address	255.255.255.25
Auto-Demotion	RTU UDP Port Number (decimal)	1234
Communication	Maximum Bytes Per Request	256

Communication

- **RTU Global Address:** This property specifies the hex address of the device. For Client devices, the default setting is 0. For Server devices, the default setting is non-zero. To find the address in OpenBSI NetView, right-click on the device and select **Properties | BSAP**.
 - **Note:** Although Client devices can also have a non-zero global address, users should follow convention and use the zero global address for communications.
- **RTU IP Address:** This property specifies the IP address of the RTU. For Client devices, this is the IP of the Client. For Server devices, this is the IP of the Client.
 - **Note:** In the BSAP IP protocol, the Client device passes requests to the Servers using the Global Address.
- **RTU UDP Port Number:** This property specifies the port number of the Client device. For Server devices, this is the port number of the Client.
- **Maximum Bytes Per Request:** This property specifies the maximum number of bytes that will be sent to the device per request. The amount specified should depend on the device's bandwidth and performance

requirements.

● **Note:** If communications with a device are fast and bandwidth is available, users should specify a larger number of bytes per request. If communications are slow or bandwidth is limited, users should specify a smaller amount of bytes per request.

Device Properties – Timing

The Timing group controls the device's timeout properties.

Property Groups	<input checked="" type="checkbox"/> Timing	
Tag Generation	Level	1
Communication	Request Timeout (ms)	1000
Timing	Fail After Successive Timeouts	3
Tag Import Settings		

Level: Specify the device's network level. The valid range is 1 to 6. The default is 1.

● **Note:** Level One devices are clients and have a Global Address of 0. Level Two devices are servers. Level Three devices are servers of servers. The higher the level, the more latency when communicating with the device. This setting updates the "Request timeout" property.

Request Timeout: Specify the number of milliseconds that the driver will wait for a response from the device. The default is 1000 milliseconds.

● **Note:** If a response is not received within this period, the driver will resend the request depending on the "Fail after successive timeouts" property. If the driver receives a malformed response, it will resend the request right away. Failure recovery improves when the device sends a valid response that is corrupted by network noise.

Fail After Successive Timeouts: Specify how many request timeouts can occur before the request is failed. The valid range is 1 to 10. The default is 3.

Device Properties – Tag Import Properties

The Tag Import Properties property group specifies the tag import file that will be used in automatic tag generation.

Property Groups	<input checked="" type="checkbox"/> Tag Import Settings	
Tag Import Settings	Tag Import File	

Tag import file: Specify the device's tag import file. It must be a valid signal (*.sig) file.

● For more information, refer to [Automatic Tag Generation](#).

Device Properties – Redundancy

Property Groups	<input checked="" type="checkbox"/> Redundancy	
General	Secondary Path	Channel.Device 1 ...
Scan Mode	Operating Mode	Switch On Failure
Timing	Monitor Item	
Auto-Demotion	Monitor Interval (s)	300
Redundancy	Return to Primary ASAP	Yes

Redundancy is available with the Media-Level Redundancy Plug-In.

● Consult the website, a sales representative, or the [user manual](#) for more information.

Optimizing Communications

This driver supports communications with underlying BSAP child devices through a client Ethernet device. Due to the nature of the BSAP protocol, communications to lower-level BSAP devices may be slower. As such, users may need to make special design considerations in the server configuration to attain optimal communication performance.

Channel and Device Setup

Communication to multiple devices on a channel is serialized. When communications with one device is slow, the performance of the other devices on the channel will decrease. To avoid degradation in performance, users can place slower devices on separate channels.

● **Note:** Devices located on a common BSAP level should be grouped under the same channel in the server.

Multi-Home NIC

Separating devices onto different channels effectively improves performance, but is limited in that each channel requires a unique port and NIC combination. To eliminate the limitation, users can multi-home an NIC card and bind multiple channels to the same port.

Request Size

The device's Request Size directly impacts performance. For maximum performance, 256 bytes is generally recommended; however, a lower request size may increase performance in situations where bandwidth is limited. Lower request sizes are also generally recommended for non-client devices. The valid range is 64 to 256 bytes.

Request Frequency

Frequently asking slower devices for data will slow down a channel's communications. To better control this, users can limit the rate at which data is requested from the device with the Scan Mode property.

Cached Data

The Bristol IP Driver does not maintain cached tag data after the client removes the tag from the server. Every time the server adds or re-adds a tag on behalf of the requesting client, the server will request the data from the device and send it to the client. This behavior ensures data freshness. Applications that require the reading of cached values should do so at the client level. Techniques for caching are as follows:

1. Have the client add the tag as inactive. Then, perform reads when fresh data is needed.
2. Have the client add the tag as active and configure the device's Scan Mode property to poll the device. Then perform cached reads when data is needed.

Data Types Description

Data Type	Description
Boolean	1 byte
Float	4-byte floating point
String	Null-terminated ASCII character array

Address Descriptions

Bristol addresses depend on the model. For more information, refer to the subtopics below.

Network 3000 Series Devices

The syntax for Network 3000 Series devices is as follows: *<Base>.<Ext>.<Att>*.

- **Base:** This element must be 1 to 8 characters in length and begin with a letter or pound sign (#). The remaining characters will consist of letters and numbers.
- **Ext:** This element must be 0 to 6 characters in length, and consist of letters or numbers.
- **Att:** This element must be 0 to 4 characters in length, and consist of letters or numbers.

● **Note:** An example of the syntax is "#DIAL.001.Val".

ControlWave Devices

The syntax for ControlWave devices is as follows: *<Access>.<Signal Name>*.

- **Access:** This element is the Bristol program name for local variables (or "%GV" for global and system variables).
- **Signal Name:** This element must contain letters, numbers, or a period and start with a letter or underscore. Signal names that start with an underscore are system variables.

● **Note:** An example of the syntax is "%GV.MYSIGNAL".

Error Descriptions

The following messages may be generated. Click on the link for a description of the message.

[<Operation> on device <device name> signal <signal> caused an overflow. Some data has been lost.](#)

[<Operation> on device <device name> signal <signal> failed. The device does not contain this signal.](#)

[<Operation> on device <device name> signal <signal> failed. The device requires higher level permissions to perform this operation.](#)

[<Operation> on device <device name> signal <signal> failed. The request was malformed or incomplete.](#)

[A read by address failed because the MSD version for device <device name> changed. The driver is sending read by name requests to get the updated MSD version from the device.](#)

[A write by address failed because the MSD version for device <device name> changed. The driver is sending a write by name request to the device.](#)

[Failed to send a request to device <device>. The device is not communicating.](#)

[Failed to send a request to device <device>. The packet is malformed or too large.](#)

[Failed to stop Winsock communications.](#)

[Failure to initiate 'winsock.dll' \[Error:<error>\].](#)

[Invalid BSAP function.](#)

[Read failed on device <device> address <address>. The server expects this address to be of type <type>, but it is of type <type> in the device.](#)

[The response received from device <device> contains an invalid sequence number. Review timing properties.](#)

[The response received from device <device> is malformed.](#)

[The response received from device <device> is too large \(%<count> bytes\). The data is lost.](#)

[The signal was not found.](#)

[The string written to device <device>, address <address> is too long. The max supported string is <count> characters. The write will continue as is, but the device will truncate the value.](#)

[Unable to bind to port <port> on Channel <channel>.](#)

[Unable to create a socket connection for Channel <channel>.](#)

[Unable to generate a tag database for device <device name>. Reason: Import file does not contain any valid signals.](#)

[Write to device <device name> signal <signal> failed. The signal's manual inhibit attribute is set to false, not allowing writes.](#)

[Write to device <device name> signal <signal> failed. The signal is read only.](#)

[Write to device <device name> signal <signal> failed. The write value is invalid. Make sure the value is within the approved BSAP range.](#)

<Operation> on device <device name> signal <signal> caused an overflow. Some data has been lost.

Error Type:

Error

Possible Cause:

A read or write operation on a signal caused a data overflow. The operation completed, but only part of the data was read or written to the device.

Solution:

1. If writing data to the device, verify that the data is in the correct format for the data type.
2. Verify that the String being written to the device is within the 64 character limit and is null terminated.

● **Note:** Boolean Tags take up one byte, Float Tags take up four bytes, and String Tags can be up to 64 characters (and must be null terminated).

<Operation> on device <device name> signal <signal> failed. The device does not contain this signal.

Error Type:

Error

Possible Cause:

1. An operation was performed on a signal that is not in the device.
2. An attempt was made to write an out-of-range value to a tag in a ControlWave device.

Solution:

1. Check the tag address, and ensure that it matches the signal name in the device.
2. Check the data type of the tag in the ControlWave device. Then, ensure the value that will be written is within the range of values for that data type.

<Operation> on device <device name> signal <signal> failed. The device requires higher level permissions to perform this operation.

Error Type:

Error

Possible Cause:

The device does not have sufficient permissions to perform the operation.

Solution:

Check the permission settings for the signal in the device configuration. Then, ensure that the signal allows the operation to be performed with the highest level of permissions.

● **Note:** The permission level is sent by the driver as part of the request, and is set to the highest level by default. This error is uncommon.

<Operation> on device <device name> signal <signal> failed. The request was malformed or incomplete.

Error Type:

Error

Possible Cause:

1. The driver is attempting to communicate with a device that is not supported.
2. Communications between the driver and device are noisy and causing malformed packets.

Solution:

1. Ensure that the device with which the driver is communicating is supported.
2. Ensure that the communication line between the driver and device is reliable.

● **Note:** This error may indicate a problem in the driver. If the solutions listed above fail, contact Technical Support.

A read by address failed because the MSD version for device <device name> changed. The driver is sending read by name requests to get the updated MSD version from the device.

Error Type:

Warning

Possible Cause:

A configuration change occurred in the device that caused the MSD version to update. This changed the MSD address for all signals and caused the read to fail.

Solution:

The driver will reissue the read as a read-by-name and will automatically update the MSD information. No action is necessary.

● **Note:** It is not recommended that configuration changes be made to the physical device while the driver is connected and receiving data. Users should disconnect the driver, make the configuration changes, and reconnect.

A write by address failed because the MSD version for device <device name> changed. The driver is sending a write by name request to the device.

Error Type:

Warning

Possible Cause:

A configuration change occurred in the device that caused the MSD version to update. This changed the MSD address for all signals and caused the write to fail.

Solution:

The driver will reissue the write as a write-by-name. This will complete the write, but will not update the device's MSD information. Future writes will be write-by-name until a read occurs.

● **Note:** It is not recommended that configuration changes be made to the physical device while the driver is connected and receiving data. Users should disconnect the driver, make the configuration changes, then reconnect.

Failed to send a request to device <device>. The device is not communicating.

Error Type:

Error

The communication timed out.

Possible Cause:

1. The device is offline or the driver is not configured to communicate with the device properly.
2. The device is not supported.
3. The correct Network Adapter is not chosen, for example, "Default" is selected.

Solution:

1. Ensure that the device can be reached by the driver by attempting to ping the device's IP address.
2. Ensure that the device is supported.
3. In the Ethernet Communications channel property, select the proper Network Adapter.

Failed to send a request to device <device>. The packet is malformed or too large.

Error Type:

Error

Possible Cause:

1. The driver is attempting to communicate with a device that is not supported.
2. Communications between the driver and device are noisy and are causing malformed packets.
3. The driver is attempting to write to a tag whose address length plus data length exceeds the maximum message size that is supported by the Bristol BSAP IP protocol.

Solution:

1. Ensure that the device with which the driver is communicating is supported.
2. Ensure that the communication line between the driver and device is reliable.
3. Perform a device read on the tag, then attempt a write. If the error persists, shorten the address in the device and then try again.

● **Note:** This error may indicate a problem in the driver. If the solutions listed above fail, contact Technical Support.

Failed to stop Winsock communications.

Error Type:

Error

Winsock was placed in an invalid state. This may cause the next startup to fail.

Possible Cause:

1. Failed to cleanup Winsock while the driver was shutting down.
2. Winsock was never initialized.
3. A blocking socket call was in progress while the driver was shutting down.

Solution:

1. Restart the server and connect to a Bristol device.
2. Ensure that the operating system has the latest patches.

Failure to initiate 'winsock.dll' [Error:<error>].

Error Type:

Error

The driver cannot communicate over Ethernet without Winsock.

Possible Cause:

1. The underlying system is not ready to initialize network communications.
2. The version of Winsock requested is not supported.
3. A Winsock operation is already in progress.

Solution:

1. Restart the server.
2. Ensure that the operating system has the latest patches.

Invalid BSAP function.

Error Type:

Error

Possible Cause:

1. The BSAP function code sent to the device is invalid. The operation failed.
2. The device is not officially supported. The operation failed.
3. Communications between the driver and device are unreliable. The operation failed.

Solution:

1. Ensure that the device is supported.
2. Ensure that the communication line between the driver and device is reliable.

Read failed on device <device> address <address>. The server expects this address to be of type <type>, but it is of type <type> in the device.

Error Type:

Error

Possible Cause:

The client requested a Float Tag, but the actual type is a String. The tag read failed and the tag was set to Bad quality.

Solution:

For Static Tags, match the client-requested type to the device type by changing the tag type in the configuration. For Dynamic Tags, the client must change the request type.

● **Note:** This error can occur any time that the client type does not match the device type. The device read succeeds, but the server cannot convert the device type to the client type.

The device is not responding.

Error Type:

Error

The communication timed out.

Possible Cause:

1. The correct Network Adapter is not chosen, for example, "Default" is selected.

Solution:

1. In the Ethernet Communications channel property, select the proper Network Adapter.

The response received from device <device> contains an invalid sequence number. Review timing properties.

Error Type:

Warning

Possible Cause:

A response was received from the device, but the sequence number in the response packet does not match the sequence number issued in the request. The response will be ignored. The driver will continue waiting for a valid response (depending on the Timing properties specified in Device Properties).

Solution:

1. Increase the value specified in the device's Request Timeout property.
2. Increase the value specified in the device's Fail After Successive Timeouts property.

The response received from device <device> is malformed.**Error Type:**

Error

Possible Cause:

1. The device is not supported. The response will be ignored. A new request will be sent, depending on the device's timeout configuration.
2. The communications line between the driver and the device is unreliable.

Solution:

1. Ensure that the device is supported.
2. Verify that the communication line between the driver and device is reliable.

The response received from device <device> is too large (%<count> bytes). The data is lost.**Error Type:**

Error

Possible Cause:

The size of the device's response is too large for the driver. The driver ignored the response.

Solution:

1. Ensure that the device with which the driver is communicating is supported.
2. Limit the size of the requests by changing the Maximum Bytes Per Request property. This will also limit the size of the response.

● **Note:** This error is uncommon.

The signal was not found.**Error Type:**

Error

Possible Cause:

The signal was not in the device. The operation on the signal failed.

Solution:

Check the device configuration and ensure that the signal is in the device and matches the tag address.

The string written to device <device>, address <address> is too long. The maximum supported string is <count> characters. The write will continue as is, but the device will truncate the value.

Error Type:

Warning

Possible Cause:

The String being written to the device is too large. The device ignored the excess characters in the String or ignored the write entirely.

Solution:

Check the maximum String size allowed for the address in the device. Then, ensure that the write does not exceed this size.

● **Note:** The default String size is 64 characters (including the null terminator).

Unable to bind to port <port> on Channel <channel>.

Error Type:

Error

Possible Cause:

The port is already in use or is unavailable. There are no communications on the channel.

Solution:

Verify that no other processes are using the port and Network Interface Controller. To do so, run the "netstat" command in Windows. Then, change the port or network interface if possible.

● **Note:** This error is most common in cases where channels have duplicate Network Interface Controllers and ports. This can occur between any channels; it is not limited to channels for this driver. Other programs on the machine can also be using the port.

Unable to create a socket connection for Channel <channel>.

Error Type:

Error

Possible Cause:

While initializing a channel, the driver failed to get a valid socket from the system. There are no communications on the channel.

Solution:

Restart the server or reconnect the clients.

● **Note:** This failure usually indicates that there is something wrong with the system (which could be out of sockets or in a Bad state).

Unable to generate a tag database for device <device name>. Reason: Import file does not contain any valid signals.

Error Type:

Error

Possible Cause:

A corrupted .sig file was imported. The tag database was not generated.

Solution:

Verify that the .sig file is valid. Then, re-import the file.

Write to device <device name> signal <signal> failed. The signal's manual inhibit attribute is set to false, not allowing writes.

Error Type:

Error

Possible Cause:

The signal is configured not to allow manual changes during Runtime; as such, write operations are also not allowed.

Solution:

Check the device configuration's manual inhibit setting for the signal, then change it accordingly. Users may want to change the server Tag's access to read only.

Write to device <device name> signal <signal> failed. The signal is read only.

Error Type:

Error

Possible Cause:

The driver attempted to write to a device signal that is read only.

Solution:

Check the device configuration to see if the signal is read only. If it is, then change the server tag to read only. This will cause the server to stop writes before they make it to the device.

Write to device <device name> signal <signal> failed. The write value is invalid. Make sure the value is within the approved BSAP range.

Error Type:

Error

Possible Cause:

1. The String, Float, or Boolean written to the device is malformed or is too large.
2. The type being written is different than the device data type (such as when writing a String to a Float signal).

Solution:


1. Ensure that the signal data type in the device matches the write.
2. If the signal is a String, ensure that the length does not exceed the device's 64-character limitation and is null terminated.

Appendix: Tag Generation

The Bristol IP Driver can automatically generate tags using a signal (*.sig) file, which is created by Bristol OpenBSI software. The procedure for creating the signal file is different for DPC 33xx devices and ControlWave devices.

DPC33xx Devices

1. To start, open the **ACCOL Workbench**. Then, define a signal.
2. In **Signal Properties**, ensure that **Mark as Global** is enabled.
3. Next, launch the **BBI Signal Extraction Utility**. Then, locate **Mark All Signals as Alarms** and ensure that it is disabled.
4. In **Load File**, browse for and specify the load file.
5. In **Output File**, browse for and specify the output file.

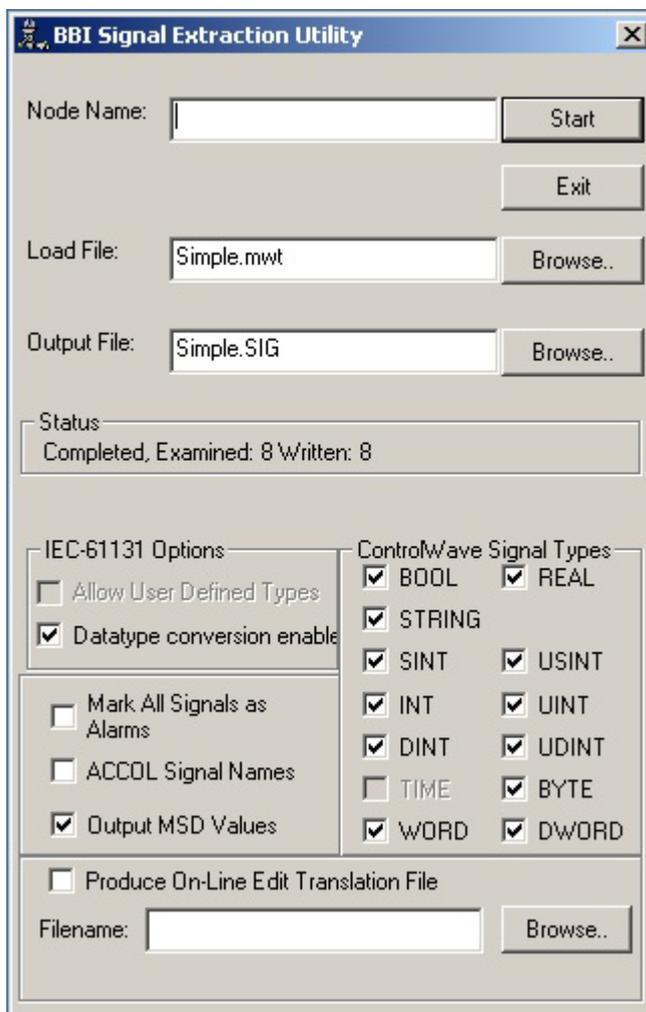

6. Once finished, click **Start** to extract the signals.

ControlWave Devices

1. To start, open **ControlWave Designer**. Then, ensure that the **OPC** column property box is enabled for all signals that will be exported.

Name	Type	Usage	Description	Address	Init	Retain	PDD	OPC	TB
Default									
MyString	STRING	VAR_GLOBAL	A global variable of type STRING			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MyReal	REAL	VAR_GLOBAL	A global variable of type REAL			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
MyBool	BOOL	VAR_GLOBAL	A global variable of type BOOL			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

- Next, open the controller's **Resource Properties**.

Resource settings for ARM_L_40

Port: COM1 COM2 COM3 COM4

DLL

Baud: 19200
 Stopbits: 1
 Databits: 8
 Parity: None
 Timeout: 2000 ms

Stack check on PLC
 Array boundary check on PLC
 Force BOOL8 for boolean variables
 Generate bootproject during compile

DLL: TCP/IP

Parameter: -ip10.10.50.42 -T02000

PDD: All global variables
 Marked variables

OPC: All global variables
 Marked variables

Use reserve: All POU's Marked POU's No reserve

Buttons: Ok, Cancel, Data area..., Help

- Locate **PDD**, then ensure that the **Marked Variables** property is enabled.

◆ **Note:** All Global Variables is optional.

- Once finished, click **OK**.
- Choose **Start|All Programs|OpenBSI Tools|Common Tools|Signal Extractor**.

6. Select the **Browse** (...) button next to the "Load File:" and locate and select the .mwt project with the tags
7. If desired, select a different output directory by using the **Browse** (...) button next to the "Output File:" and locate the desired location
8. Select **Start** and the tag file is exported to the selected folder.
9. Place the exported signal file where the server can access it.
10. Enter the signal file into the "Tag import file" field in the **Tag Import Properties** property group of the device properties.
11. The signals can now be created with the database creation functionality.

Index

A

A read by address failed because the MSD version for device <device name> changed. The driver is sending read by name requests to get the updated MSD version from the device. 20

A write by address failed because the MSD version for device <device name> changed. The driver is sending a write by name request to the device. 20

Address Descriptions 16

Allow Sub Groups 14

Auto-Demotion 12

Automatic Tag Generation 26

B

BSAP Networks 5

C

Channel-Level Settings 9

Channel Assignment 10

Channel Properties – Advanced 8

Channel Properties – Communication Serialization 8

Channel Properties – Ethernet Communications 7

Channel Properties – General 6

Channel Properties – Write Optimizations 7

Channel Setup 6

Communication 14

Create 14

D

Data Collection 11

Data Types Description 16

Delete 14

Demote on Failure 12

Demotion Period 12

Device Properties – Auto-Demotion 12

Device Properties – General 10

Device Properties – Redundancy 15

Device Properties – Tag Generation 13

Diagnostics 7

Discard Requests when Demoted 12

Do Not Scan, Demand Poll Only 12
Driver 10
Duty Cycle 8

E

Error Descriptions 18
Ethernet Settings 7

F

Failed to send a request to device <device>. The device is not communicating. 20
Failed to send a request to device <device>. The packet is malformed or too large. 20
Failed to stop Winsock communications. 21
Failure to initiate winsock.dll [Error <error>]. 21

G

General 10
Generate 13
Global Settings 9

I

ID 11
Identification 6, 10
Initial Updates from Cache 12
Inter-Device Delay 8
Invalid BSAP function. 22

L

Load Balanced 9
Local Port 9

M

Model 10

N

Name 10
Network 1 - Network 500 9
Network Adapter 7
Network Mode 9
Non-Normalized Float Handling 8

O

On Device Startup 13
On Duplicate Tag 13
On Property Change 13
Operating Mode 11
Operation on device <device name> signal <signal> caused an overflow. Some data has been lost. 18
Operation on device <device name> signal <signal> failed. The device does not contain this signal. 19
Operation on device <device name> signal <signal> failed. The device requires higher level permissions to perform this operation. 19
Operation on device <device name> signal <signal> failed. The request was malformed or incomplete. 19
Optimization Method 7
Optimizing Communications 16
Overview 5
Overwrite 14

P

Parent Group 14
Priority 9

R

Read failed on device <device> address <address>. The server expects this address to be of type <type>, but it is of type <type> in the device. 22
Redundancy 15
Replace with Zero 8
Respect Tag-Specified Scan Rate 12

S

Scan Mode 12
Setup 10
Simulated 11

T

Tag Counts 7, 11

Tag Generation 13

Tag Import Properties 15

The device is not responding. 22

The response received from device <device> contains an invalid sequence number. Review timing properties. 22

The response received from device <device> is malformed. 23

The response received from device <device> is too large (%<count> bytes). The data is lost. 23

The signal was not found. 23

The string written to device <device>, address <address> is too long. The max supported string is <count> characters. The write will continue as is, but the device will truncate the value. 24

Timeouts to Demote 12

Timing 15

Transactions per Cycle 9

U

Unable to bind to port <port> on Channel <channel>. 24

Unable to create a socket connection for Channel <channel>. 24

Unable to generate a tag database for device <device name>. Reason - Import file does not contain any valid signals. 24

Unmodified 8

V

Virtual Network 9

W

Write All Values for All Tags 7

Write Only Latest Value for All Tags 8

Write Only Latest Value for Non-Boolean Tags 7

Write to device <device name> signal <signal> failed. The signal's manual inhibit attribute is set to false, not allowing writes. 25

Write to device <device name> signal <signal> failed. The signal is read only. 25

Write to device <device name> signal <signal> failed. The write value is invalid. Make sure the value is within the approved BSAP range. 25